



# COMPACT ELECTRIC BOOSTER WATER HEATERS

Models C-4, -5, -6, -7, -9, -12, -13, -15, -17, -18, -24, -27, -30, -36, -39, -45, -54, -57

The Hatco Compact Electric Booster Water Heater provides all the 180°F (82°C) final rinse water required to sanitize and flash-dry dishes and flatware.

## FLEXIBILITY

The space saving Compact is easy to install next to the dishwasher with slide brackets or on 6" (152 mm) legs. The storage capacity is 6 gallons (23 liters).

## QUALITY

The following features assure the finest performance for years to come:

- All models include a Castone® lined tank with a 10-year limited warranty.
- Features include a temperature/pressure relief valve, a pressure reducing valve, two temperature/pressure gauges, a high-temperature limit control, pilot indicator light, on-off switch, and a low-water cut-off to prevent element burnout due to a low water condition.
- Available with slide brackets for mounting under a dishtable.
- Each booster has fiberglass insulation to minimize heat loss.
- Hatco electric booster heaters are factory pre-plumbed and pre-wired with calibrated immersion thermostat and high-temperature limit switch.
- A stainless steel front panel and powder-coated silver-gray hammertone body is standard on all Compact models.
- Swing-away front panels with low-water cut-off, control fuses and transformer allow quick access to probes and elements for easier serviceability.



Model C-24 on 6" (152 mm) legs



Model C-18 on 6" (152 mm) legs



Water Temperature Recovery Table

Compact Model	40°F (22°C) Rise	70°F (39°C) Rise
C-4	40 gph ( 151 lph)	23 gph ( 87 lph)
C-5	50 gph ( 189 lph)	29 gph ( 110 lph)
C-6	60 gph ( 227 lph)	34 gph ( 129 lph)
C-7	70 gph ( 265 lph)	40 gph ( 151 lph)
C-9	90 gph ( 341 lph)	52 gph ( 197 lph)
C-12	120 gph ( 454 lph)	69 gph ( 261 lph)
C-13	135 gph ( 511 lph)	77 gph ( 292 lph)
C-15	151 gph ( 572 lph)	86 gph ( 326 lph)
C-17	173 gph ( 655 lph)	99 gph ( 375 lph)
C-18	181 gph ( 685 lph)	103 gph ( 390 lph)
C-24	241 gph ( 912 lph)	138 gph ( 522 lph)
C-27	271 gph (1026 lph)	155 gph ( 587 lph)
C-30	301 gph (1139 lph)	172 gph ( 651 lph)
C-36	361 gph (1367 lph)	206 gph ( 780 lph)
C-39	391 gph (1480 lph)	224 gph ( 848 lph)
C-45	452 gph (1711 lph)	258 gph ( 977 lph)
C-54	542 gph (2052 lph)	310 gph (1174 lph)
C-57	573 gph (2169 lph)	326 gph (1234 lph)

## WATER QUALITY REQUIREMENTS

Incoming water in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being supplied to booster heater(s). Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

**Note: Product failure caused by liming or sediment buildup is not covered under warranty.**




HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
[www.hatcocorp.com](http://www.hatcocorp.com) • E-mail: [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)




# COMPACT ELECTRIC BOOSTER WATER HEATERS

Models C-4, -5, -6, -7, -9, -12, -13, -15, -17, -18, -24, -27, -30, -36, -39, -45, -54, -57

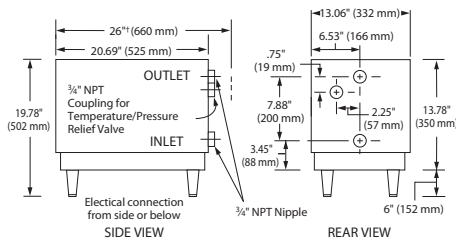

Models 4-18 kW

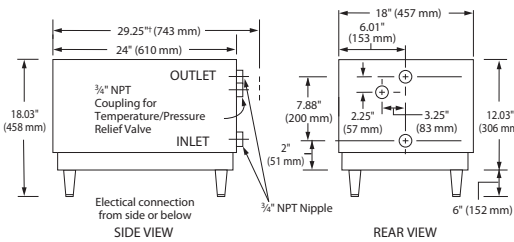

Models 24-57 kW

## DIMENSIONS

4kW to 18kW: 13.06\"W x 20.69\"D  
(26\"+) x 13.78\"H without legs  
(332 x 525 (660 mm<sup>+</sup>) x 350 mm).

24kW to 57kW: 18\"W x 24\"D  
(29.25\"+) x 12.03\"H without legs  
(457 x 610 (743 mm<sup>+</sup>) x 306 mm).

† Includes Temperature/Pressure Relief Valve.

## VOLTAGE

208, 240 and 480 volts available.  
Export voltages available.

## SPECIFICATIONS

Model	kW	Volts	1-Phase		3-Phase		Shipping Weight
			Amps	Breaker/Fuse Size	Amps	Breaker/Fuse Size	
C-4	4	208	19.3	30	11.2	—	105 lbs. (48 kg)
		240	16.7	30	9.7	—	
		480	8.4	15	4.9	—	
C-5	5	208	24.1	30	13.9	—	105 lbs. (48 kg)
		240	20.9	30	12.1	—	
		480	10.5	15	6.1	—	
C-6*	6	208	28.9	40	28.9*	40	118 lbs. (54 kg)
		240	25	40	25*	30	
		480	12.5	—	12.5*	15	
C-7*	7	208	33.7	50	33.7*	40	118 lbs. (54 kg)
		240	29.2	40	29.2*	40	
		480	14.6	—	14.6*	20	
C-9*	9	208	43.3	60	43.3*	50	118 lbs. (54 kg)
		240	37.5	50	37.5*	50	
		480	18.8	—	18.8*	20	
C-12	12	208	57.7	90	33.4	50	120 lbs. (54 kg)
		240	50	70	28.9	40	
		480	25	—	14.5	20	
C-13	13.5	208	65	90	37.5	50	120 lbs. (54 kg)
		240	56.3	90	32.5	50	
		480	28.2	—	16.3	30	
C-15	15	208	72.2	90	41.7	60	120 lbs. (54 kg)
		240	62.5	90	36.1	50	
		480	31.3	—	18.1	30	
C-17 <sup>‡</sup>	17.2	208	—	—	47.9	60	120 lbs. (54 kg)
C-18 <sup>§</sup>	18	208	86.6	125	—	—	120 lbs. (54 kg)
		240	75	100	43.4	60	
		480	37.5	—	21.7	30	

Model	kW	Volts	1-Phase		3-Phase		Shipping Weight
			Amps	Breaker/Fuse Size	Amps	Breaker/Fuse Size	
C-24	24	208	115.4	150	66.7	90	142 lbs. (64 kg)
		240	100	125	57.8	90	
		480	—	—	28.9	40	
C-27	27	208	129.9	175	75	100	142 lbs. (64 kg)
		240	112.5	150	65	90	
		480	—	—	32.5	50	
C-30	30	208	144.3	200	83.3	125	142 lbs. (64 kg)
		240	125	175	72.2	100	
		480	—	—	36.1	50	
C-36	36	208	173.1	225	100	125	142 lbs. (64 kg)
		240	150	200	86.7	125	
		480	—	—	43.4	60	
C-39	39	208	187.5	250	108.3	150	142 lbs. (64 kg)
		240	162.5	225	93.9	125	
		480	—	—	47	60	
C-45 <sup>†</sup>	45	208	—	—	125	175	142 lbs. (64 kg)
		240	187.5	250	108.3	150	
		480	—	—	54.2	70	
C-54 <sup>**</sup>	54	208	—	—	149.9	200	142 lbs. (64 kg)
		240	—	—	130	175	
		480	—	—	65	90	
C-57 <sup>**</sup>	57	208	—	—	158.3	200	142 lbs. (64 kg)
		240	—	—	137.2	175	
		480	—	—	68.6	90	

\* Only 6, 7, & 9kW Models, 208 and 240 volts only, can be field converted to single phase (units are shipped 3-phase open delta). Larger branch circuit required than for balanced 3-phase of equal kW. (Balanced 3-phase available, consult factory.)

‡ 17.2kW models available in 208V 3-phase only.

§ 18kW models not available in 208V 3-phase.

† Not available in 208V single phase.

\*\* Not available in 208V or 240V single phase.

## OPTIONS (NOT FOR RETROFIT)

- All Stainless Steel Body and Base
- Slide Brackets (In lieu of Standard 6" (152 mm) Legs)
- Adjustable Stainless Steel Legs 6" to 7" (152 to 178 mm)
- Brass Pressure Reducing Valve with Bypass
- Floor Mounting Hardware

- Security Package

## ACCESSORIES

- Blended Phosphate Water Treatment System
- Shock Absorber – To Reduce Water Hammer
- Back Pressure Relief Valve

## PRODUCT SPECS Electric Booster Water Heater

The Electric Booster Water Heater to supply the final 180°F (82°C) rinse for the dishwasher shall be a Compact Model ...as manufactured for commercial use by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the booster shall have the capacity to heat ...gph (lph) from 120°F to 180°F (49°C to 82°C) and it shall be rated at ...kW, ...volts, ...phase. The tank shall be designed for a working pressure of 150 psi (1034 kPa) and hydrostatically tested at 300 psi (2069 kPa) with a Hatco Castone® lining.

The heater shall be complete with all internal plumbing, including 3/4" NPT pipe and fittings for inlet and outlet. All controls shall be built-in, including contactors and prewired in accordance with UL #1453 and 422.11 NEL 2002. Proper surface mounting

circuit breaker or fused disconnect switch shall be provided by electrical contractor.

Electric heating elements shall be metal sheathed, controlled by an ambient compensating immersion thermostat. The booster shall be protected with high-temperature limit switch (ECO) and low-water cut-off.

The heater shall consist of stainless steel front and silver-gray hammertone body with standard 6" (152 mm) legs (or stainless steel body, base, and stainless steel adjustable legs).

The heater shall include a temperature/pressure relief valve, high-temperature pressure reducing valve with bypass, and two indicating temperature/pressure gauges.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350  
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com