

INCREASE YOUR IMPULSE FOOD SALES

Flav-R-Fresh® Impulse Display Cabinets

A profitable way to create impulse food sales is with the Flav-R-Fresh Holding and Display Cabinet. Using controlled moisturized heat allows you to showcase your product longer using minimum counter space.



*FDWD-1 with
rotating 4-tier rack,
and accessory pans*

- Digital temperature monitor
- New Euro design features full view display with tempered glass sides and door
- Controlled heat and humidity for longer holding times
- Accommodates half-size sheet pans
- Revolving or stationary display racks
- Single- or double-sided opening models
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product
- Optional *Designer Colors*: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green

Unique Needs, Exact Solutions.



*Printed colors are a representation and may not exactly match our *Designer Colors*.




Nothing less than the best.™

800.558.0607
www.hatcocorp.com



FLAV-R-FRESH® IMPULSE DISPLAY CABINETS

Models FDWD-1, FDWD-1X, FDWD-2, FDWD-2X

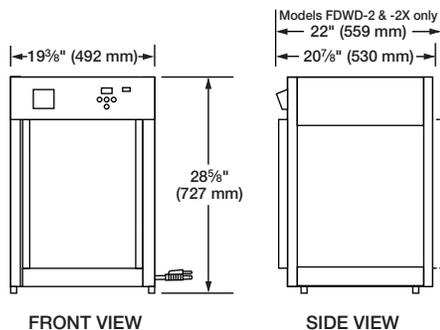

DIMENSIONS

FDWD-1, FDWD-1X: 19 $\frac{3}{8}$ "W x 20 $\frac{7}{8}$ "D x 28 $\frac{5}{8}$ "H
(492 x 530 x 727 mm).

FDWD-2, FDWD-2X: 19 $\frac{3}{8}$ "W x 22"D x 28 $\frac{5}{8}$ "H
(492 x 559 x 727 mm).

Cabinet Opening: 15 $\frac{3}{4}$ "W x 19 $\frac{3}{4}$ "H
(400 x 502 mm).

VOLTAGE


120 volts, 60 Hz, 1420 watts, 11.8 amps (uses NEMA 5-15P).

Export voltages available.

CORD LOCATION

Facing controls, right-hand side panel, lower right corner.

PLUG CONFIGURATIONS

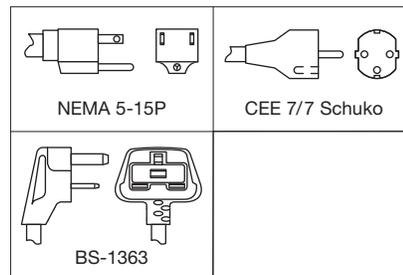

SPECIFICATIONS

Model*	Type	Rack Style	Shipping Weight
FDWD-1	1 Door	Circle Rack† with Rack Motor	80 lbs. (36 kg)
FDWD-1X	1 Door	Multi-Purpose Rack without Rack Motor	82 lbs. (37 kg)
FDWD-2	2 Doors	Circle Rack† with Rack Motor	86 lbs. (39 kg)
FDWD-2X	2 Doors	Multi-Purpose Rack without Rack Motor	88 lbs. (40 kg)

* Models FDWD-1 and FDWD-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

† Pretzel Rack available in lieu of Circle Rack.

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.


OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green
- Three Sided Sign Holder


ACCESSORIES

- 4-Tier Circle Rack (Requires motorless rack coupling on -X models)
- 4-Shelf Multi-Purpose Rack (Each shelf 13 $\frac{5}{8}$ "W x 12 $\frac{5}{8}$ "D (346 x 321 mm))
- 4-Shelf Angle Rack (Each shelf 14"W x 14 $\frac{1}{2}$ "D (356 x 368 mm))
- 3-Tier Pretzel Tree (Requires motorless rack coupling on -X models)
- Motorless Rack Coupling (For -X models only)
- 4" (102 mm) Adjustable Legs with Brackets
- Merchandising Display Sign Holder
- Graphic Adhesive Decals (3 per set)
 - Pizza Photo
 - Hot Pizza
 - Hot Pretzel


Display Rack Selection




4-Tier Circle Rack
Model FDWD4TCR
Rack Opening:
3 $\frac{1}{4}$ " (83 mm)
Maximum
15" (381 mm)
diameter pans



4-Shelf Multi-Purpose Rack*
Model FDWD4SMP
Rack Opening:
3 $\frac{1}{2}$ " (89 mm)



4-Shelf Angle Rack
Model FDWD4SAR
Rack Opening:
3 $\frac{3}{4}$ " (95 mm)



3-Tier Pretzel Tree
Model FDWD3TPT
Rack Opening:
5 $\frac{7}{8}$ " (149 mm)

* Accommodates half-size sheet pans (Not included).

PRODUCT SPECS

Impulse Display Cabinet

The humidity controlled Impulse Display Cabinet shall be a Flav-R-Fresh® Model ...rated at ...volts and ...watts, as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the cabinet shall havedoor(s), tempered glass sides,

stationary rack (or revolving display), and incandescent display light. It shall include a water reservoir, humidity selector switch, temperature selector dial, on-off switch, and indicating lights. A 6' (1829 mm) cord with plug shall be attached.

Accessories shall include merchandising racks, display sign(s), and food graphic decals.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-Mail: equipsales@hatcocorp.com