



GLO-RAY® FRY HOLDING STATIONS

Models GRFHS-16, -21, -PTT21, -26, -PT16, -PT26
GRFS-24, GRFSL-24, GRFSR-24, GRFSLR-24 GRFSC-18, GRFSC-18, GRFSCR-18, GRFSC-18

Hatco Glo-Ray® Fry Holding Stations safely keep fried foods at optimum serving temperatures. Heating elements direct Glo-Ray's pre-focused heat without continuing to cook or dry out the food.

FLEXIBILITY

GRFHS features ceramic heating elements above, allowing ample space between the warmer and food bin to empty baskets. A pre-set thermostatically- controlled heated base maintains uniform holding temperatures from below. The slotted holding bin permits rising heat to envelop the food, preventing soggy product. Various hardcoated fry ribbons are offered to stage boxed and/or bagged products for quick-serve areas.

GRFS is designed with a swing-away post mount, on-off toggle switch, and attached cord with plug. Models containing metal sheathed heating elements are available with 10", 11", 12", or 13" (254, 279, 305, or 330 mm) clearance. Models with ceramic elements have 16.75", 18", or 20" (425, 457, or 508 mm) clearances.

QUALITY

The following features assure the finest performance for years to come:

- Fry stations hold fried foods safely at optimum serving temperatures.
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food.
- Optional left or right side cutout on the GRFHS-21 model, to allow room to empty fry baskets.
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage (standard on all GRFHS models).
- Easy installation.



Model GRFHS-21 with
accessory 7 pleat hardcoated
fry bag ribbon



Model GRFHS-PT26 with accessory 8 pleat hardcoated
fry box ribbon (scoops not included)



Model GRFHS-PTT21 with
scoop holder



Model GRFSC-18 with swing-away post mount and
cord with plug and accessory food pan



METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEARS, CERAMIC AND BLANKET ELEMENTS FOR ONE YEAR.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. GRFHS Spec Sheet

Printed in U.S.A.
April 2009




GLO-RAY® FRY HOLDING STATIONS


Models GRFHS-16, -21, -PTT21, -26, -PT16, -PT26
GRFS-24, GRFSL-24, GRFSR-24, GRFSLR-24 GRFSC-18, GRFSC-18, GRFSCR-18, GRFSCLR-18

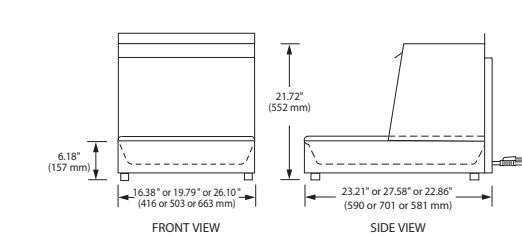


Model GRFHS-16, -21, -26

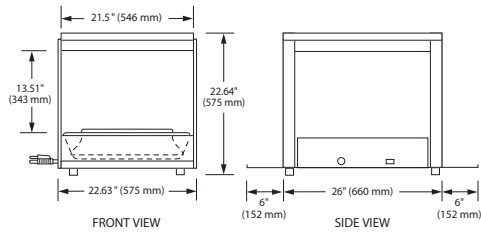


Model GRFHS-PTT21

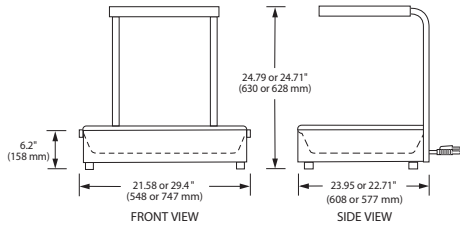

Model GRFHS-PT16, -PT26

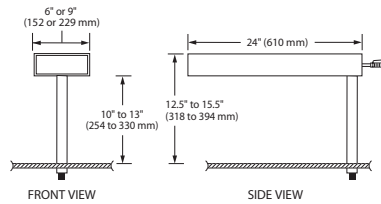

Model GRFS

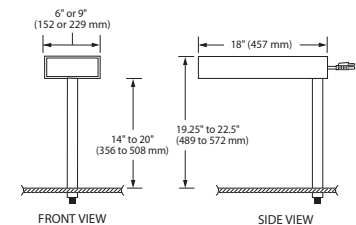

Model GRFSC

SPECIFICATIONS

Portable Fry Stations

Model	Volts	Watts	Amps	Shipping Weight
GRFHS-16	120	1090	9.1	63 lbs. (29 kg)
GRFHS-21	120	1200	10.0	67 lbs. (30 kg)
GRFHS-PTT21	120	1740	14.5	80 lbs. (36 kg)
GRFHS-26	120	1200	10.0	68 lbs. (31 kg)
GRFHS-PT16	120	1090	9.1	61 lbs. (28 kg)
GRFHS-PT26	120	1440	12.0	64 lbs. (29 kg)

Fry Stations – Metal Sheathed Elements

Model*	Watts	Amps	Shipping Weight
GRFS-24 ^o	500	4.2	12 lbs. (5 kg)
GRFSL-24 ^o	620	5.2	14 lbs. (6 kg)
GRFSR-24 ^{†o}	500	4.2	12 lbs. (5 kg)
GRFSLR-24 ^{†o}	620	5.2	14 lbs. (6 kg)

Fry Stations – Ceramic Elements

Model*	Watts	Amps	Shipping Weight
GRFSC-18 [□]	750	6.3	18 lbs. (8 kg)
GRFSC-18 [□]	870	7.3	20 lbs. (9 kg)
GRFSCR-18 ^{†□}	750	6.3	13 lbs. (6 kg)
GRFSCLR-18 ^{†□}	870	7.3	15 lbs. (7 kg)

* "C" in model name indicates ceramic element.

"L" in model name indicates unit with lights.

□ Specify clearance of 16.75", 18", or 20" when ordering. Standard is 18".

† Fry Station warmer without cord and plug, UL Recognized. Supply wires through mounting post.

o Specify clearance of 10", 11", 12", or 13" when ordering.

DIMENSIONS

GRFHS-16: 16.38"W x 23.21"D x 21.72"H (416 x 590 x 552 mm).
GRFHS-21: 19.79"W x 27.58"D x 21.72"H (503 x 701 x 552 mm).
GRFHS-PTT21: 22.63"W x 38"D x 22.64"H (575 x 965 x 575 mm).
GRFHS-26: 26.1"W x 22.86"D x 21.72"H (663 x 581 x 552 mm).
GRFHS-PT16: 21.58"W x 23.95"D x 24.79"H (548 x 608 x 630 mm).
GRFHS-PT26: 29.4"W x 22.71"D x 24.71"H (747 x 577 x 628 mm).
GRFS-24 & GRFSR-24: 6"W x 24"D x 12.5"-15.5"H
(152 x 610 x 318-394 mm).
GRFSL-24 & GRFSLR-24: 9"W x 24"D x 12.5"-15.5"H
(229 x 610 x 318-394 mm).
GRFSC-18 & GRFSCR-18: 6"W x 18"D x 19.25"-22.5"H
(152 x 457 x 489-572 mm).
GRFSCLR-18 & GRFSCLR-18: 9"W x 18"D x 16.5"-22.5"H
(229 x 457 x 419-572 mm).


VOLTAGE

120 volts, single phase (uses NEMA 5-15P) (GRFHS-PTT21 uses NEMA 5-20P for Canada). Export voltages available.

CORD LOCATION

GRFHS-16, -21, -26, -PT16, -PT26 Models: Back side, lower right corner.
GRFHS-PTT21 Model: Lower right-hand side.
GRFS Models: Back, upper middle.

PLUG CONFIGURATIONS



OPTIONS (NOT FOR RETROFIT)

- Halogen Bulb in lieu of Standard Display Light
- Left or Right side Cutout (GRFHS-21) (Adds 1.7" (43 mm) to width of unit)
- Infinite Control (GRFSL and GRFSL models only)

ACCESSORIES

- 4 Pleat Hardcoated Fry Box Ribbon (GRFHS-16 & -26)
- 5 Pleat Hardcoated Fry Bag Ribbon (GRFHS-16 & -26)
- 5 Pleat Hardcoated Fry Box Ribbon (GRFHS-21)
- 6 Pleat Hardcoated Fry Box/Bag Combo Ribbon (GRFHS-21)
- 7 Pleat Hardcoated Fry Bag Ribbon (GRFHS-21)

- 8 Pleat Hardcoated Fry Bag Ribbon (GRFHS-21)
- 8 Pleat Hardcoated Fry Box Ribbon (GRFHS-PT26)
- 9 Pleat Hardcoated Fry Box/Bag Combo Ribbon (GRFHS-PT26)
- 10 Pleat Hardcoated Fry Bag Ribbon (GRFHS-PT26)
- Sectional Divider (GRFHS only, one standard per unit)
- 5" (127 mm) side-by-side bag holder (GRFHS-21)
- 5" (127 mm) piggy back bag holder (GRFHS-21 & -PTT21)
- Scoop Holder
- Food Pans
- Wire Trivet

PRODUCT SPECS

Fry Holding Station

The Fry Holding Station shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Fry Holding Station shall be rated at ... watts, ... volts, and be ... inches

(millimeters) in overall width. It shall consist of either a stainless steel housing or an aluminum housing with ceramic or metal sheathed heating elements. Portable warmer features wire guards, shatter-resistant incandescent display lights, a lighted on-off switch, and 6' (1829 mm) cord and plug.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com