

ULTRA-GLO™ CERAMIC INFRARED FOODWARMERS

Models UGA-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72
 UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
 UGAHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
 UGAL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

Hatco Ultra-Glo Ceramic Foodwarmers ensure maximum flavor, safety and holding time without continuing to cook the food. The prefocused heat pattern provides an increased pyramidal dimension, enveloping the food holding area not just side-to-side, but front-to-back. Heat is concentrated at the edges where heat loss is the greatest.

FLEXIBILITY

The increased height the ceramic heat source offers improves operational working clearances, giving the chef and server an improved ergonomic environment in which to work.

With a variety of widths and options, Ultra-Glo Ceramic Foodwarmers are adaptable to any location and configuration. Back or front-of-the-house use, open kitchen concepts or buffet lines, Ultra-Glo is available in continuous single or dual aluminum housings up to 6' (1829mm), with or without lights. Angle brackets and hanging tabs come standard, non-adjustable tubular stands are optional.

Ultra-Glo models have a clear anodized finish and are available in optional glossy translucent colors or standard *Designer* colors.


QUALITY

The following features assure the finest performance for years to come:

- Available in widths from 18" to 72" (457-1829 mm).
- Sturdy continuous aluminum housings eliminate sagging.
- Prefocused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations, and colors provide unlimited flexibility.
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage.



Model UGAH-18
with remote control box (not shown) and optional translucent gloss finish

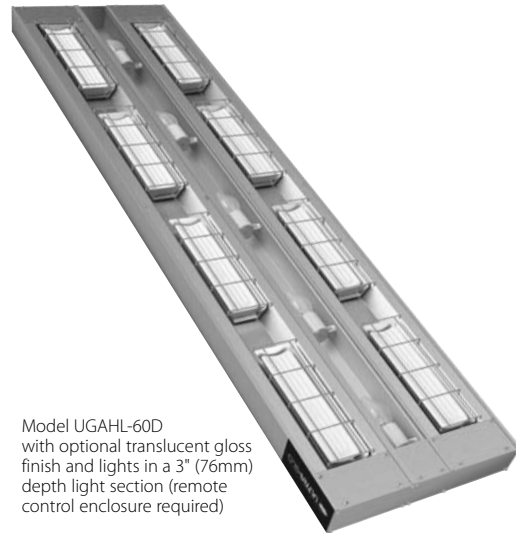

Model UGAHL-60D
with optional translucent gloss finish and lights in a 3" (76mm) depth light section (remote control enclosure required)



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

CERAMIC HEATING ELEMENTS GUARANTEED AGAINST BURNOUT FOR ONE YEAR.



Form No. UGA Spec Sheet

Printed in U.S.A.
March 2009



ULTRA-GLO™ CERAMIC INFRARED FOODWARMERS

Models UGA-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72
 UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
 UGAHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
 UGAL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

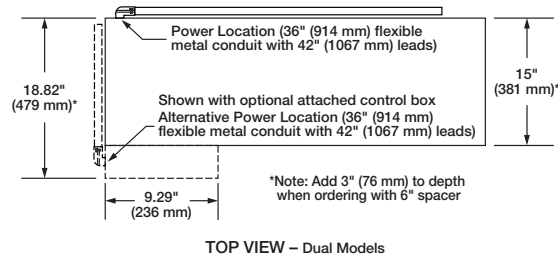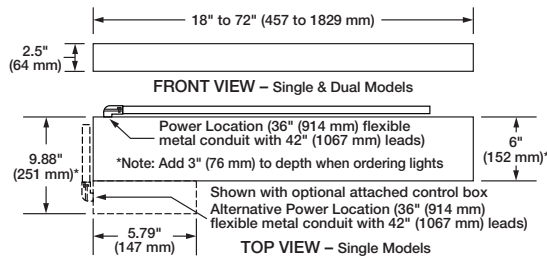

SPECIFICATIONS

Single Models

Aluminum High Watt		Aluminum Standard Watt			
Model	Watts†	Model	Watts†	Width	Shipping Weight*
UGAH-18	675	UGA-18	490	18" (457 mm)	9 lbs. (4 kg)
UGAH-24	750	UGA-24	675	24" (610 mm)	10 lbs. (5 kg)
UGAH-30	1125	UGA-30	840	30" (762 mm)	11 lbs. (5 kg)
UGAH-36	1350	UGA-36	980	36" (914 mm)	12 lbs. (5 kg)
UGAH-42	1500	UGA-42	1120	42" (1067 mm)	13 lbs. (6 kg)
UGAH-48*	2025	UGA-48	1470	48" (1219 mm)	14 lbs. (6 kg)
UGAH-54*	2250	UGA-54*	1470	54" (1372 mm)	16 lbs. (7 kg)
UGAH-60*	2700	UGA-60*	1960	60" (1524 mm)	17 lbs. (8 kg)
UGAH-66*	2700	UGA-66*	1960	66" (1676 mm)	19 lbs. (9 kg)
UGAH-72*	3000	UGA-72*	1960	72" (1829 mm)	20 lbs. (9 kg)

Dual Models

Aluminum High Watt		Aluminum Standard Watt			
Model	Watts†	Model	Watts†	Width	Shipping Weight*
UGAH-18D	1350	UGA-18D	980	18" (457 mm)	17 lbs. (8 kg)
UGAH-24D	1500	UGA-24D	1350	24" (610 mm)	19 lbs. (9 kg)
UGAH-30D*	2250	UGA-30D	1500	30" (762 mm)	21 lbs. (10 kg)
UGAH-36D*	2700	UGA-36D*	1960	36" (914 mm)	24 lbs. (11 kg)
UGAH-42D*	3000	UGA-42D*	2240	42" (1067 mm)	27 lbs. (12 kg)
UGAH-48D*	4050	UGA-48D*	2940	48" (1219 mm)	30 lbs. (14 kg)
UGAH-54D*	4500	UGA-54D*	2940	54" (1372 mm)	33 lbs. (15 kg)
UGAH-60D*	5400	UGA-60D*	3920	60" (1524 mm)	37 lbs. (17 kg)
UGAH-66D*	5400	UGA-66D*	3920	66" (1676 mm)	40 lbs. (18 kg)
UGAH-72D*	6000	UGA-72D*	3920	72" (1829 mm)	44 lbs. (20 kg)

DIMENSIONS

Single Models with Remote Control Enclosure:

18"-72"W x 6"D▲ x 2.5"H (457-1829 x 152 x 64 mm).

Single Models with Attached Control Box:

18"-72"W x 9.88"D▲ x 2.5"H (457-1829 x 251 x 64 mm).

Dual Models with Remote Control Enclosure:

18"-72"W x 15"D▲ x 2.5"H
(457-1829 x 381 x 64 mm).

Dual Models with Attached Control Box:

18"-72"W x 18.82"D▲ x 2.5"H
(457-1829 x 478 x 64 mm).

Remote Control Enclosure: 5.5", 9", 14", 16", or 20"W x 3"D
x 2.5"H (140, 229, 356, 406, or 508 x 76 x 64 mm).

Attached Control Box: 5.79" (single) or 9.29" (dual) W x 3.88"D
x 2.5"H (147 or 251 x 98 x 64 mm).

▲ Add 3" (76 mm) to depth when ordering single model units with lights. Add 3" (76 mm) to depth when ordering dual models with 6" (152 mm) spacer.

OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Gloss Finishes: Gleaming Gold, Glossy Gray, Bold Black, Radiant Red, Brilliant Blue
- Remote Control Enclosure

Single Models with Lights

Aluminum High Watt		Aluminum Standard Watt			
Model	Watts†	Model	Watts†	Width	Shipping Weight*
UGAHL-18	735	UGAL-18	550	18" (457 mm)	12 lbs. (5 kg)
UGAHL-24	870	UGAL-24	795	24" (610 mm)	13 lbs. (6 kg)
UGAHL-30	1245	UGAL-30	870	30" (762 mm)	15 lbs. (7 kg)
UGAHL-36	1530	UGAL-36	1160	36" (914 mm)	17 lbs. (8 kg)
UGAHL-42	1680	UGAL-42	1300	42" (1067 mm)	18 lbs. (8 kg)
UGAHL-48*	2265	UGAL-48	1710	48" (1219 mm)	20 lbs. (9 kg)
UGAHL-54*	2490	UGAL-54*	1710	54" (1372 mm)	22 lbs. (10 kg)
UGAHL-60*	3000	UGAL-60*	2260	60" (1524 mm)	23 lbs. (10 kg)
UGAHL-66*	3000	UGAL-66*	2260	66" (1676 mm)	25 lbs. (11 kg)
UGAHL-72*	3360	UGAL-72*	2320	72" (1829 mm)	27 lbs. (12 kg)

Dual Models with Lights

Aluminum High Watt		Aluminum Standard Watt			
Model	Watts†	Model	Watts†	Width	Shipping Weight*
UGAHL-18D	1410	UGAL-18D	1040	18" (457 mm)	17 lbs. (8 kg)
UGAHL-24D	1620	UGAL-24D	1470	24" (610 mm)	19 lbs. (9 kg)
UGAHL-30D*	2370	UGAL-30D	1620	30" (762 mm)	21 lbs. (10 kg)
UGAHL-36D*	2880	UGAL-36D*	2140	36" (914 mm)	24 lbs. (11 kg)
UGAHL-42D*	3180	UGAL-42D*	2420	42" (1067 mm)	27 lbs. (12 kg)
UGAHL-48D*	4290	UGAL-48D*	3180	48" (1219 mm)	30 lbs. (14 kg)
UGAHL-54D*	4790	UGAL-54D*	3180	54" (1372 mm)	33 lbs. (15 kg)
UGAHL-60D*	5700	UGAL-60D*	4220	60" (1524 mm)	37 lbs. (17 kg)
UGAHL-66D*	5700	UGAL-66D*	4220	66" (1676 mm)	40 lbs. (18 kg)
UGAHL-72D*	6360	UGAL-72D*	4280	72" (1829 mm)	44 lbs. (20 kg)

† Based on 208 volts. * Does not include RMB. • Not available in 120 volts.

VOLTAGE

120, 208 and 240 volts, single phase.

Models with Lights: 120, 120/208 and 120/240 volts, single phase.

MOUNTING REQUIREMENTS

ULTRA-GLO WARMERS MUST BE MOUNTED AT LEAST 1" (25 mm) BELOW SHELF.

ULTRA-GLO SINGLE STD. WATT WARMERS SHOULD BE POSITIONED 14" TO 18" (356-457 mm) ABOVE A NON-METALLIC SURFACE, DUAL STD. WATT WARMERS SHOULD BE POSITIONED 18" TO 22" (457-559 mm) ABOVE A NON-METALLIC SURFACE.

ULTRA-GLO SINGLE HIGH WATT WARMERS SHOULD BE POSITIONED 16" TO 22" (406-559 mm) ABOVE A NON-METALLIC SURFACE, DUAL HIGH WATT WARMERS SHOULD BE POSITIONED 22" TO 26" (559-660 mm) ABOVE A NON-METALLIC SURFACE.

- Non-Adjustable Tubular Stands – 14"-24" (356-610 mm)
- Incandescent Lights
- Halogen Bulbs in lieu of Standard Display Lights
- Additional High-Temp Lead Wire
- Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay, and Indicator Light (in lieu of attached control box)

PRODUCT SPECS

Infrared Foodwarmer

The Infrared Foodwarmer shall be an Ultra-Glo™, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Foodwarmer shall be an Ultra-Glo Model ..., rated at ...,watts, ...,volts, single phase and be ...inches (millimeters) in overall width.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

The Ultra-Glo shall consist of an aluminum housing, ceramic heating element, and angle brackets for mounting. Remote Control Enclosure is recommended. Mounting heights between 14" to 18" (356-457 mm) single std. watt, 18" to 22" (457-559 mm) dual std. watt, 16" to 22" (406-559 mm) single high watt, and 22" to 26" (559-660 mm) dual high watt.