



Glo-Max[®] Curved Infrared Strip Heaters

Models

GM5AH	-24/-30/-36/-42/-48/-54/-60/-66/-72/-78
GM5AHL	-24/-30/-36/-42/-48/-54/-60/-66/-72/-78

This stylish design, based on our Glo-Max strip heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while accenting and warming the products below.

GM5AHL, with versatile LED lighting options, provides perfect coloring and coverage while lowering energy costs.

Features





- The entire holding surface is heated evenly with no "cold" spots, thanks to Hatco's dependable infrared element technology
- 10 lengths are available: 610, 762, 915, 1067, 1219, 1372, 1524, 1677, 1829, 1982 mm (24" ~ 78")
- GM5AHL has energy efficient dual LED lights across the entire strip heater which provides longer performance and energy savings (compared to standard incandescent bulbs)
- Remote box with switches control lights and heat separately
- Accessory: Sneeze-guard mounting kit
- Angle brackets are standard, non-adjustable tubular stands are an option
- GM5AHL has LED lights, GM5AH has no lights



With sneeze guard mounting kit accessory
Sneeze guard not included

Curved Infrared Strip Heaters

Models: GM5AH/GM5AHL

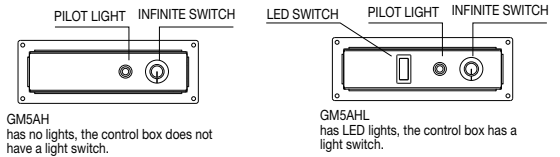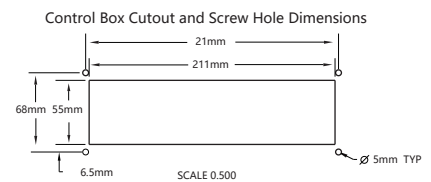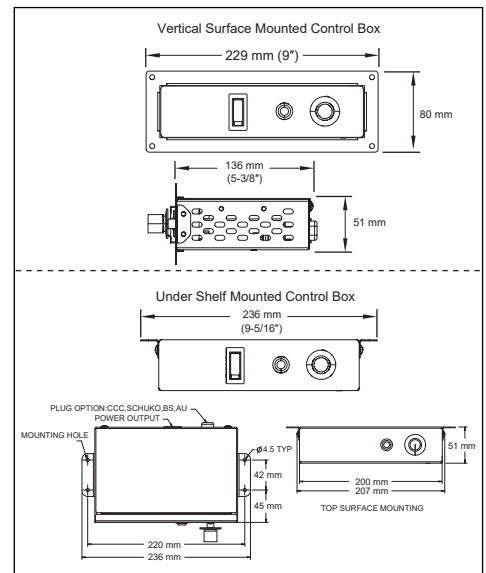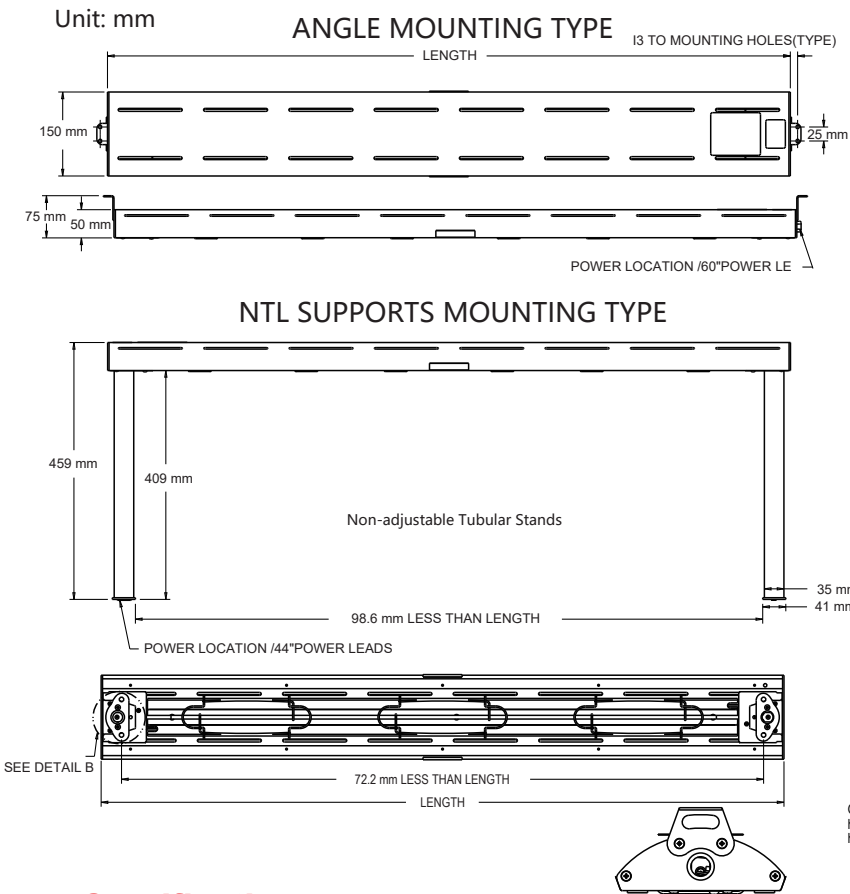

● Specification

Model	Voltage	Watts	Amps	Weight	Model	Voltage	Watts	Amps	Weight	Dimensions(A Models) WxDxH
GM5AH-24	220-230	500-546	2.3-2.4	5kg	GM5AHL-24	220-230	510-555	2.3-2.4	5kg	24" x 6" x 2" (610 x 150 x 51 mm)
	230-240	495-500	1.9-2.1	(10lbs)		230-240	467-510	2.0-2.1	(12lbs)	
GM5AH-30	220-230	660-721	3.0-3.1	5kg	GM5AHL-30	220-230	670-733	3.0-3.2	6kg	30" x 6" x 2" (762 x 150 x 51 mm)
	230-240	606-660	2.6-2.8	(11lbs)		230-240	616-670	2.7-2.8	(13lbs)	
GM5AH-36	220-230	800-874	3.6-3.8	6kg	GM5AHL-36	220-230	812-888	3.7-3.9	7kg	36" x 6" x 2" (915 x 150 x 51 mm)
	230-240	735-800	3.2-3.3	(13lbs)		230-240	748-812	3.2-3.4	(15lbs)	
GM5AH-42	220-230	950-1038	4.3-4.5	7kg	GM5AHL-42	220-230	964-1053	4.4-4.6	7kg	42" x 6" x 2" (1067 x 150 x 51 mm)
	230-240	872-950	3.8-4.0	(15lbs)		230-240	885-964	3.8-4.0	(15lbs)	
GM5AH-48	220-230	1100-1202	5.0-5.2	7kg	GM5AHL-48	220-230	1116-1220	5.1-5.3	8kg	48" x 6" x 2" (1219 x 150 x 51 mm)
	230-240	1010-1100	4.4-4.6	(16lbs)		230-240	1025-1116	4.5-4.7	(17lbs)	
GM5AH-54	220-230	1250-1366	5.7-5.9	8kg	GM5AHL-54	220-230	1267-1384	5.8-6.0	9kg	54" x 6" x 2" (1372 x 150 x 51 mm)
	230-240	1148-1250	5.0-5.2	(18lbs)		230-240	1163-1267	5.1-5.3	(19lbs)	
GM5AH-60	220-230	1400-1530	6.4-6.7	8kg	GM5AHL-60	220-230	1418-1550	6.4-6.7	9kg	60" x 6" x 2" (1524 x 150 x 51 mm)
	230-240	1286-1400	5.4-5.8	(18lbs)		230-240	1302-1418	5.7-5.9	(20lbs)	
GM5AH-66	220-230	1560-1705	7.1-7.4	9kg	GM5AHL-66	220-230	1579-1726	7.2-7.5	10kg	66" x 6" x 2" (1675 x 150 x 51 mm)
	230-240	1433-1560	6.2-6.5	(19lbs)		230-240	1450-1579	6.3-6.5	(21lbs)	
GM5AH-72	220-230	1725-1885	7.8-8.2	10kg	GM5AHL-72	220-230	1744-1907	7.9-8.3	10kg	72" x 6" x 2" (1829 x 150 x 51 mm)
	230-240	1584-1725	6.6-7.2	(21lbs)		230-240	1602-1744	7.0-8.3	(22lbs)	
GM5AH-78	220-230	1890-2066	8.6-9.0	11kg	GM5AHL-78	220-230	1910-2088	8.7-9.1	11kg	78" x 6" x 2" (1981 x 150 x 51 mm)
	230-240	1736-1890	7.5-7.9	(24lbs)		230-240	1754-1910	7.6-8.0	(24lbs)	

* Housing color: Aluminum Clear Anodized as standard

* Accessory: Sneeze-guard mounting kit

* Angle brackets and 3000K warm light LED come standard, non-adjustable stands (409mm, 16") are optional

* Power wire lead length is 1524 mm (60")

* Plugs: CCC,Schuko, BS or AU